
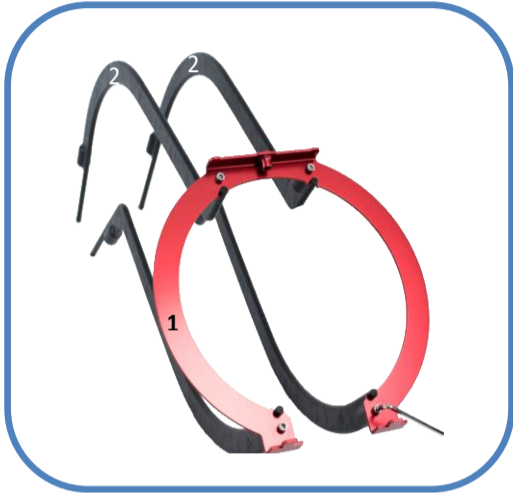



**CHUTE ASSEMBLY**

- PLACE RING 1 ONTO THE FRONT UPPER CHUTE RAILS (NO:1), USE THE ALLEN KEY TO TIGHTEN WITH SCREWS
- PLACE THE REAR UPPER CHUTES (NO:2) ONTO RING 1
- SLIDE RING 2 OVER FRAME, PLACE THE CONNECTORS (NO:3) IN LINE WITH THE BOLT HOLE, TIGHTEN WITH SCREWS
- ON THE 4 PLASTIC CHUTE PARTS NUMBER 1 AND NUMBER 2 LOOK FOR THE SILVER MARK AT THE END TO INDICATE THE TOP OF THE CHUTE WHERE THE SILVER CONNECTORS ATTACH

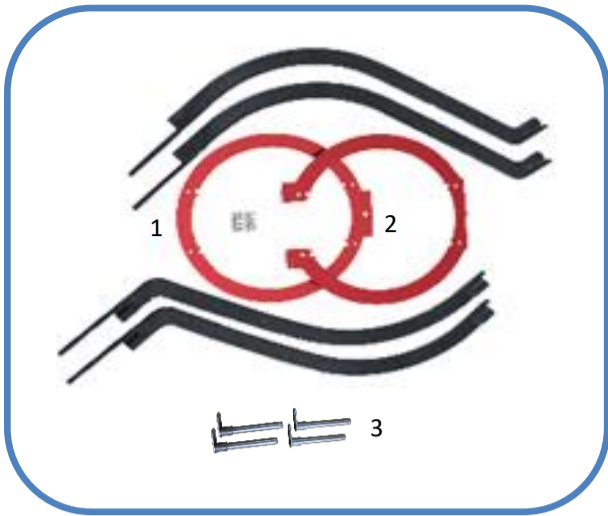


**LOWER CHUTE ASSEMBLY**

- PLACE 2 SMALL RAILS (NO:4) INTO THE RING, INSERT SCREWS & TIGHTEN
- PLACE THE LARGE RAILS (NO:3) INTO THE RING, INSERT SCREWS & TIGHTEN

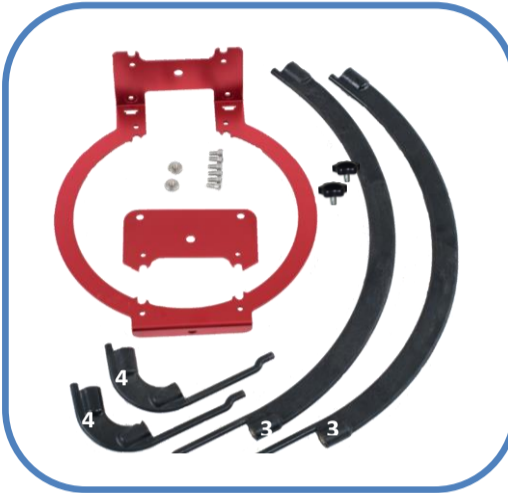

**ATTACHING LOWER CHUTE TO MACHINE**

- INSERT THE FRAME TO THE MACHINE, USING THE THUMB SCREWS TO LOCK INTO PLACE, AS PICTURED
- ATTACH THE BACKING PLATE TO THE MACHINE USING THE BLACK PLASTIC WING NUT TO LOCK INTO POSITION
- THUMB SCREWS SHOULD BE INSERTED AND FIXED FIRMLY TO MACHINE, KEEP BLACK BOLT LOOSE TO ENSURE ALL TIGHTENED AND FITTED PROPERLY

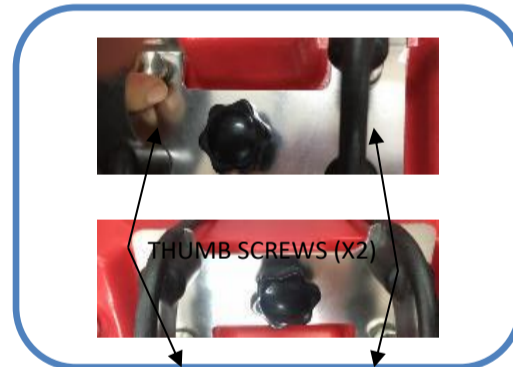



**SMALL EXTENDER**

- SHOULD YOU ENCOUNTER TWO BALLS FALLING THROUGH THE MACHINE AT ONCE, TAKE THE SMALL EXTENDER AND FIT IT TO THE BALL DROP MECHANISM AS SHOWN



**EXTENSION RAIL**

- THE 4 CONNECTORS TO FIX YOUR EXTENSION RAIL ARE PLACED ONTO THE TOP OF THE CHUTE AS SHOWN, USE THE SCREW TO ATTACH, THEN PLACE THE EXTENSION RAILS ONTO THE CONNECTORS
- WHEN PLACING BALLS INTO CHUTE, BALLS SHOULD BE PUT IN AT THE TOP OF THE CHUTE NOT THROUGH THE SIDE
- MAKE SURE THE TOP RAILS ARE FACING OUT, AS PICTURED

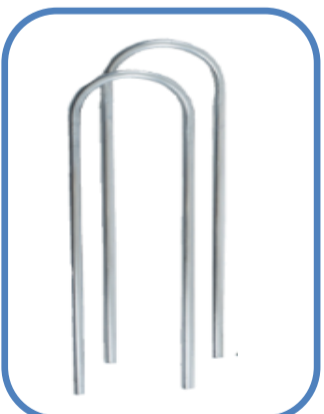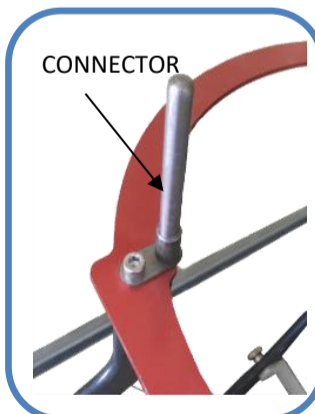

**ATTACHING THE BALL CHUTE**

- PLACE THE FRAME ONTO THE MACHINE BY LOCATING TO PINS
- MAKE SURE THAT THE BALL CHUTE AND THE MACHINE ARE FASTENED TOGETHER WITH A BLACK PLASTIC WING NUT.

